



# AquaSnap<sup>®</sup> 30AWH-P


Monobloc air-to-water heat pumps with R290 refrigerant

For residential and light commercial applications



### Natural Refrigerant

Helps minimize the environmental impact (GWP100 = 0,02\*).

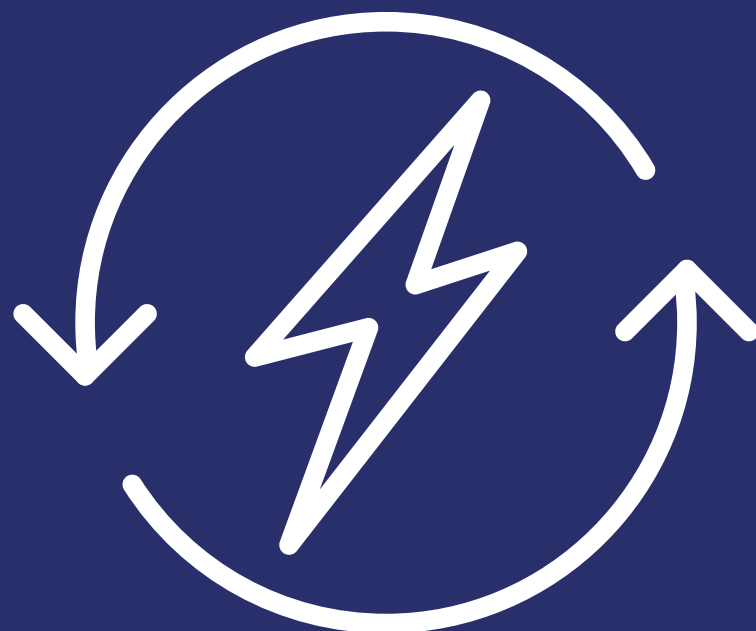


### High Energy Efficiency

Heating  
A+++ (A7°C, W35°C)\*\*  
A++ (A7°C, W55°C)\*\*.




### Wide range

From 4 kW to 14 kW  
(6 single-phase and 2 three-phase models).

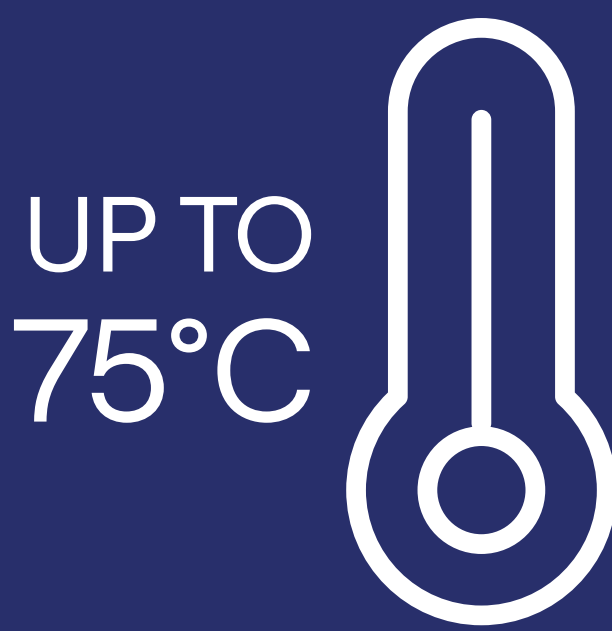


### High LWT

Leaving Water Temperature reaching up to 75° C.

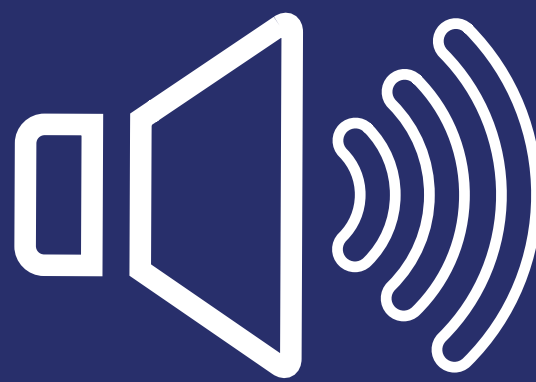

### Low Noise Operation

ErP rated sound power levels starting from 49dB(A).

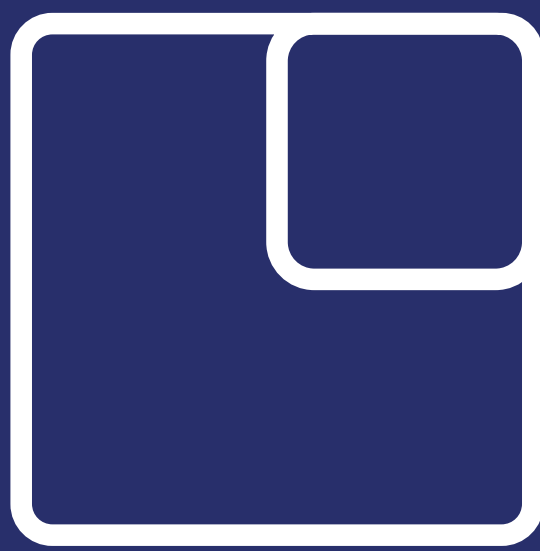

### Compact Design

Compact footprint facilitates installation, even in small spaces.



### Safety

External gas separator to further prevent any potential gas leakage.

\* Based on Regulation (EU) 2024/573

\*\* The energy efficiency class range of this product category is from D to A+++