



AquaSnap® 30AWH-NG/80AWH-NG(A)

Monobloc air-to-water heat pumps with R290 refrigerant




For residential and light commercial applications



Natural Refrigerant

Helps minimize the environmental impact (GWP100 = 0,02*).

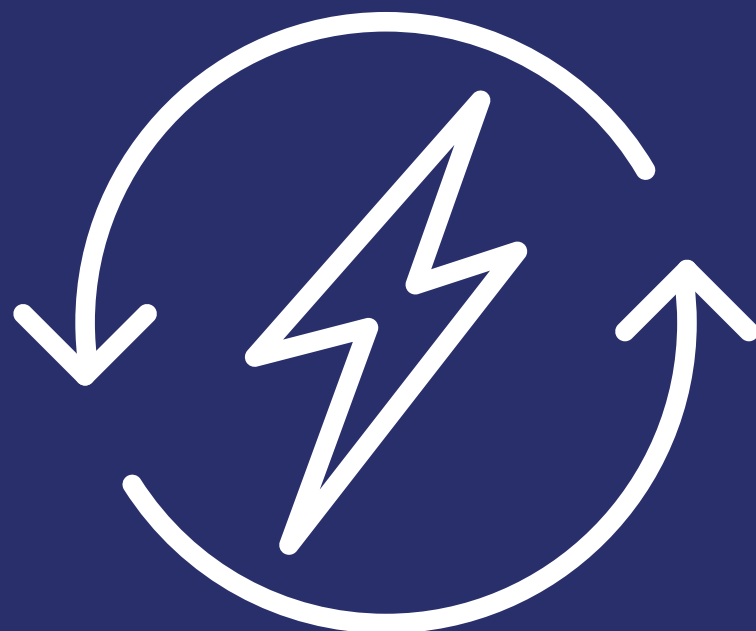

High Energy Efficiency

A+++ Heating (A7°C, W35°C)**
A+ DHW***.




Wide range

From 4 to 16 kW
(both with wall-hung or all-in-one IDU).



High integration of hydraulic components

With patented hydraulic system.

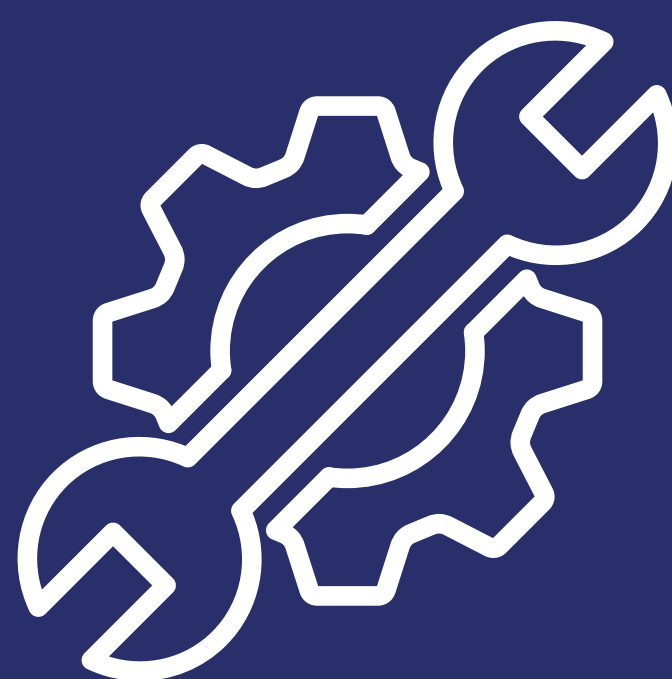

Easy Installation

Optimized layout for easy connection and access to components.



Simplified Commissioning

No need to consider minimum flow rate, circulation volume or water temperature.



Safety

Patented built-in gas separator to further prevent any potential gas leakage.



Real time remote monitoring

A single App to support technicians.

* Based on Regulation (EU) 2024/573

** The energy efficiency class range of this product category is from D to A+++

*** The energy efficiency class range of this product category is from F to A+